
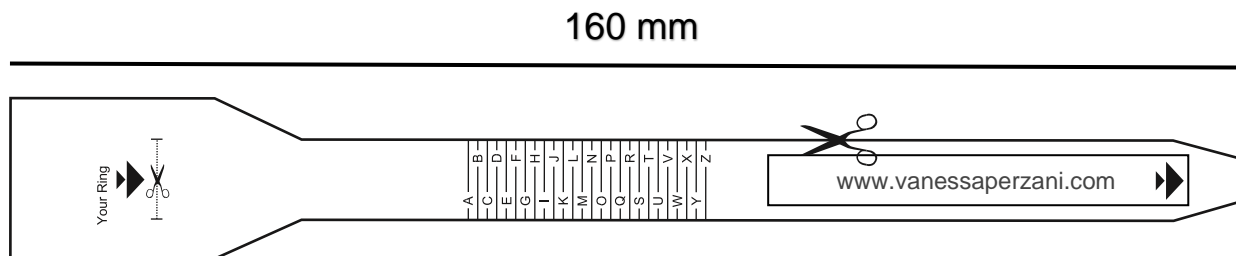


VANESSA PEDERZANI

Option 1: Printable Ring Sizer

Please make sure that your printer is set to 100% print size.

1. Print out this page.
2. Cut out your Ring Sizer as shown on the diagram.
3. Insert the sharp point marked "A" through the slot "B".
4. Place the Ring Sizer over your finger and pull the tab until it fits comfortably.
5. Read the size from the scale.


If not sure about your printer setting, do the following:

Go to **File > Print Preview > Print Size = 100% > Print Document**

Note: To verify that the printable ring sizer printed correctly, measure the ring sizer as shown above.

Must be about 160 mm.

Option 2: Ring Size Chart

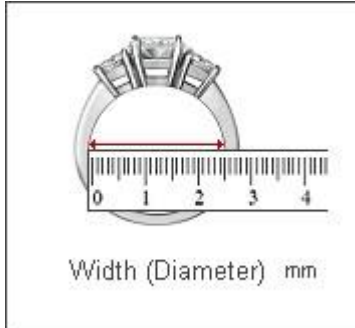

To find an approximate ring size, measure the **width** (diameter) of a ring you currently wear. Or, measure the **circumference** of your finger with a strip of paper or a string. Find the nearest measurement on the chart. If unsure between two sizes, choose the larger size.


Option 3

If you already have a fitting ring...

1. Print this page at 100%. Do Not apply any scaling to the print.
2. When you have your print, measure this line with a ruler to check that the scale is accurate
3. Place an existing ring over the template circles ensuring that you can see the whole circle underneath the ring when you look through the hole in the ring.
4. Note your size

If you do not have a ring...

1. Cut a piece of paper in to a strip and wrap it around your ringer in the appropriate place.
2. When the paper is fitting snugly, tape it in to place and slide it off your finger.
3. Simply take a ruler and measure the Diameter (the width) from one edge to the other edge of the paper.
4. Use the chart to match the Diameter to your result.

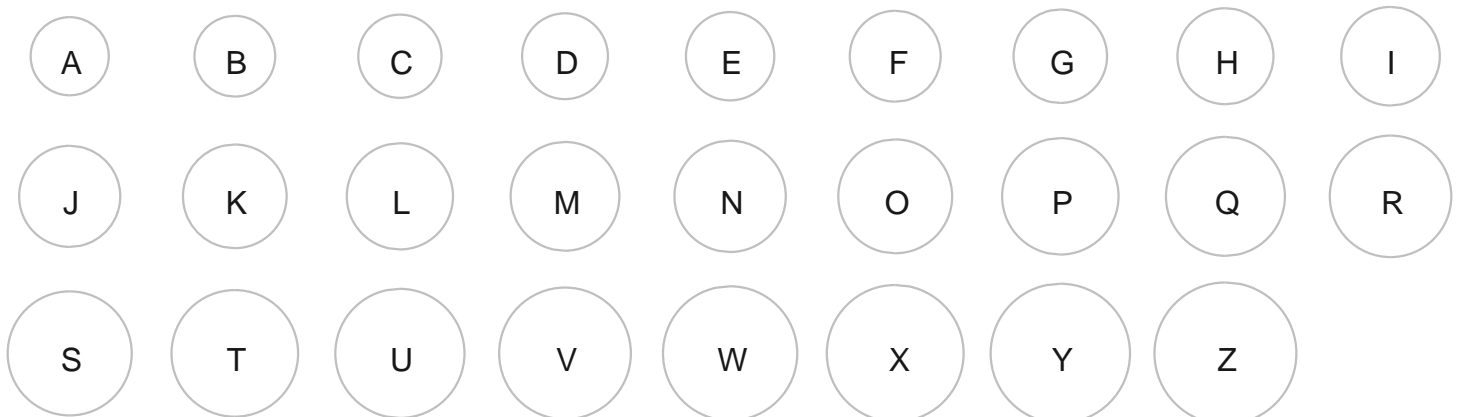

Inside Diameter		Inside Circumference		Sizes					
MM	Inches	MM	Inches	British & Australian	US & Canada	French & Russian	German	Japanese	Swiss
9.91	0.390	31.13	1.22	-	0000	-	-	-	-
10.72	0.442	33.68	1.39	-	00	-	-	-	-
11.53	0.454	36.22	1.43	-	0	-	-	-	-
11.95	0.474	37.54	1.49	A	1/2	-	-	-	-
12.18	0.482	38.26	1.51	A 1/2	3/4	-	-	-	-
12.37	0.487	38.86	1.53	B	1	-	-	1	-
12.60	0.496	39.58	1.56	B 1/2	1 1/4	-	-	-	-
12.78	0.503	40.15	1.58	C	1 1/2	-	-	-	-
13.00	0.512	40.84	1.61	C 1/2	1 3/4	-	-	-	-
13.21	0.520	41.50	1.63	D	2	41 1/2	13 1/2	2	1 1/2
13.41	0.528	42.13	1.66	D 1/2	2 1/4	-	-	-	-
13.61	0.536	42.76	1.68	E	2 1/2	42 3/4	13 3/4	3	2 3/4
13.83	0.544	43.45	1.71	E 1/2	2 3/4	-	-	-	-
14.05	0.553	44.14	1.74	F	3	44	14	4	4
14.15	0.557	44.45	1.75	F 1/2	3 1/8	-	-	-	-
14.25	0.561	44.77	1.76	F 3/4	3 1/4	-	-	-	-
14.36	0.565	45.11	1.77	G	3 3/8	45 1/4	-	5	5 1/4
14.45	0.569	45.40	1.79	G 1/4	3 1/2	-	14 1/2	-	-
14.56	0.573	45.74	1.80	G 1/2	3 5/8	-	-	6	-
14.65	0.577	46.02	1.81	H	3 3/4	46 1/2	-	-	6 1/2
14.86	0.585	46.68	1.84	H 1/2	4	-	15	7	-
15.04	0.592	47.25	1.86	I	4 1/4	47 3/4	-	-	7 3/4
15.27	0.601	47.97	1.89	I 1/2	4 1/2	-	15 1/4	8	-
15.40	0.606	48.38	1.90	J	4 5/8	49	15 1/2	-	9
15.53	0.611	48.79	1.92	J 1/4	4 3/4	-	-	-	-
15.70	0.618	49.32	1.94	J 1/2	5	-	15 3/4	9	-
15.80	0.622	49.64	1.95	K	5 1/8	50	-	-	10
15.90	0.626	49.95	1.97	K 1/4	5 1/4	-	-	-	-
16.00	0.630	50.27	1.98	K 1/2	5 3/8	-	-	10	-
16.10	0.634	50.58	1.99	L	5 1/2	51 3/4	16	-	11 3/4
16.30	0.642	51.21	2.02	L 1/4	5 3/4	-	-	-	-
16.41	0.646	51.55	2.03	L 1/2	5 7/8	-	-	-	-
16.51	0.650	51.87	2.04	M	6	52 3/4	16 1/2	12	12 3/4
16.71	0.658	52.50	2.07	M 1/2	6 1/4	-	-	-	-
16.92	0.666	53.16	2.09	N	6 1/2	54	17	13	14
17.13	0.674	53.82	2.12	N 1/2	6 3/4	-	-	-	-
17.35	0.683	54.51	2.15	O	7	55 1/4	17 1/4	14	15 1/4
17.45	0.687	54.82	2.16	O 1/2	7 1/4	-	-	-	-
17.75	0.699	55.76	2.20	P	7 1/2	56 1/2	17 3/4	15	16 1/2
17.97	0.707	56.45	2.22	P 1/2	7 3/4	-	-	-	-
18.19	0.716	57.15	2.25	Q	8	57 3/4	18	16	17 3/4
18.35	0.722	57.65	2.27	Q 1/2	8 1/4	-	-	-	-
18.53	0.729	58.21	2.29	Q 3/4	8 1/2	-	18 1/2	17	-
18.61	0.733	58.47	2.30	R	8 5/8	59	-	-	19
18.69	0.736	58.72	2.31	R 1/4	8 3/4	-	-	-	-
18.80	0.740	59.06	2.32	R 1/2	8 7/8	-	-	-	-
18.89	0.748	59.34	2.35	R 3/4	9	-	19	18	-
19.10	0.752	60.00	2.36	S	9 1/8	60 1/4	-	-	20 1/4
19.22	0.757	60.38	2.38	S 1/4	9 1/4	-	-	-	-
19.31	0.760	60.66	2.39	S 1/2	9 3/8	-	-	-	-
19.41	0.764	60.98	2.40	S 3/4	9 1/2	-	19 1/2	19	-
19.51	0.768	61.29	2.41	T	9 5/8	61 1/2	-	-	21 1/2
19.62	0.772	61.64	2.43	T 1/4	9 3/4	-	-	-	-
19.84	0.781	62.33	2.45	T 1/2	10	-	20	20	-
20.02	0.788	62.89	2.48	U	10 1/4	62 3/4	-	21	22 3/4
20.20	0.797	63.46	2.50	U 1/2	10 1/2	-	20 1/4	22	-
20.32	0.800	63.84	2.51	V	10 5/8	63	-	-	23 3/4
20.44	0.805	64.21	2.53	V 1/4	10 3/4	-	-	-	-

20.68	0.814	64.97	2.56	V 1/2	11	-	20 3/4	23	-
20.76	0.817	65.22	2.57	W	11 1/8	65	-	-	25
20.85	0.821	65.50	2.58	W 1/4	11 1/4	-	-	-	-
20.94	0.824	65.78	2.59	W 1/2	11 3/8	-	-	-	-
21.08	0.830	66.22	2.61	W 3/4	11 1/2	-	21	24	-
21.18	0.834	66.54	2.62	X	11 5/8	66 1/4	-	-	26 1/4
21.24	0.836	66.73	2.63	X 1/4	11 3/4	-	-	-	-
21.30	0.839	66.92	2.64	X 1/2	11 7/8	-	-	-	-
21.49	0.846	67.51	2.66	Y	12	67 1/2	21 1/4	25	27 1/2
21.69	0.854	68.14	2.68	Y 1/2	12 1/4	-	-	-	-
21.89	0.862	68.77	2.71	Z	12 1/2	68 3/4	21 3/4	26	28 3/4
22.10	0.870	69.43	2.73	Z +1/2	12 3/4	-	-	-	-
22.33	0.879	70.15	2.76	Z+1	13	-	22	27	-
22.60	0.890	71.00	2.80	Z+1.5	13.5	-	-	-	-
22.69	0.893	71.28	2.81	Z+2	-	-	-	-	-
22.92	0.902	72.00	2.83	Z+2.5	-	-	-	-	-
23.06	0.908	72.45	2.85	Z+3	-	-	-	-	-
23.24	0.915	73.01	2.87	Z+3.5	-	-	-	-	-
23.47	0.924	73.73	2.90	Z+4	-	-	-	-	-
23.55	0.927	73.98	2.91	Z+4.5	-	-	-	-	-
23.87	0.940	74.99	2.95	Z+5	-	-	-	-	-
24.27	0.956	76.25	3.00	Z+6	-	-	-	-	-